
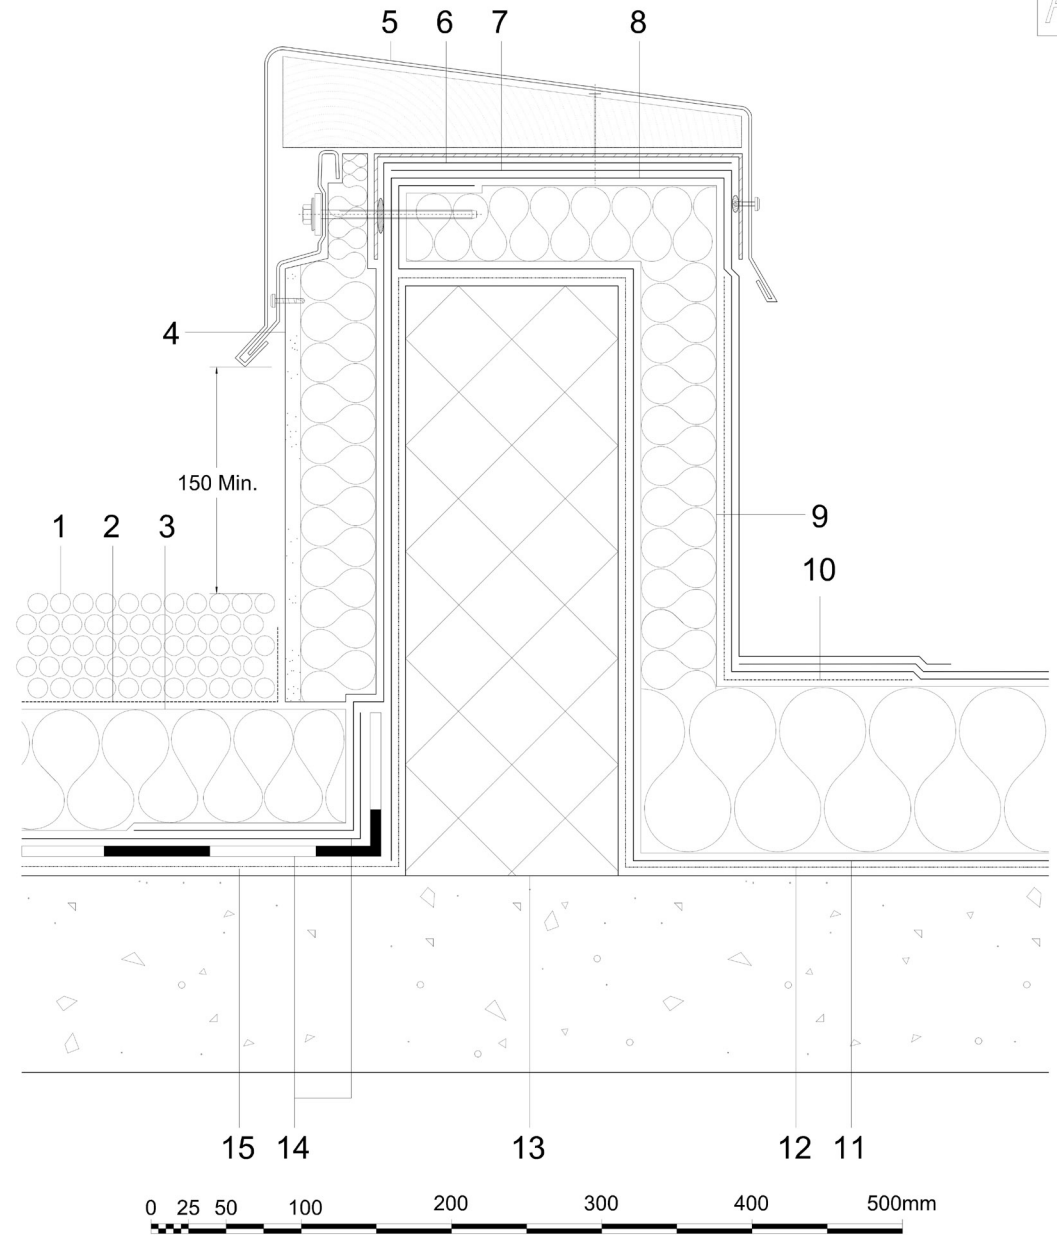


- 1 20-40mm rounded aggregate ballast with no fines installed to a min. depth of 50mm
- 2 Axter breather membrane sealed with tape
- 3 Axter inverted insulation to achieve design U-value
- 4 Axter pre-rendered upstand insulation (thickness to suit project requirements)
- 5 Metal capping by specialist contractor
- 6 Wilotekt-Plus detail membrane
- 7 Axter top layer membrane
- 8 Axter underlayer membrane
- 9 Axter Hytherm warm roof insulation to achieve design u-value and design fall if tapered
- 10 Axter 35 Py angle strip
- 11 Axter vapour barrier
- 12 Axter Vernis Antac primer
- 13 Blockwork by specialist contractor
- 14 Wilotekt-Plus structural waterproofing system
- 15 Wilotekt-Plus primer

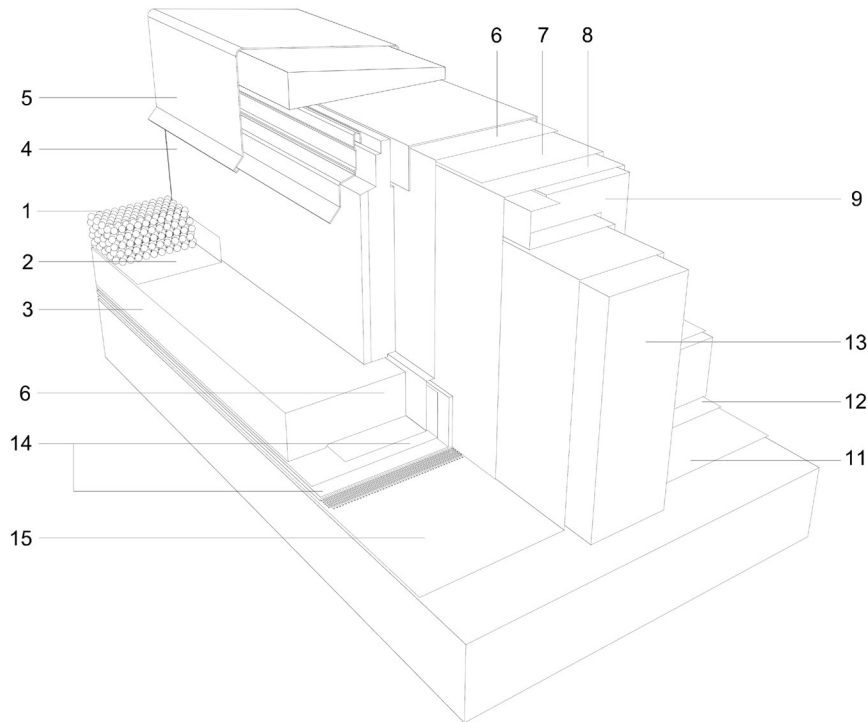

Do Not Scale. All dimensions to be checked on site by the Axtersheid Installer

Axter provide detail drawings as part of our technical design service. Such drawings should only be used as a guide during the design process and should not be utilised during construction. Axter accepts no liability for misuse of this service.

PROJECT	
CLIENT	

DRAWING		
WILOTEKT-PLUS TRANSITION ROOF DETAIL		
DWG.N°	SCALE	DATE
W10.11	NTS	

AXTER LTD
 West Road, Ransomes
 Europark, Ipswich,
 Suffolk, IP3 9SX.
 Tel:(01473)724056
 Fax:(01473)723263
 info@axterltd.co.uk

