

## COMPLEMENTARY PRODUCTS

### MAT 100


MAT 100 is a 100g glassfibre screen.

MAT 100 is used as an independent screen between deck and waterproofing system.

MAT 100 is applied loose laid onto the deck without any additional bond and with minimum 60mm wide side and 100 mm wide end laps.

Roll	: 100m × 1m
Weight	: 10kg / roll
Packaging	: 12 rolls / pallet
	: 1200m <sup>2</sup> / pallet

### INDEPENDENT SCREEN

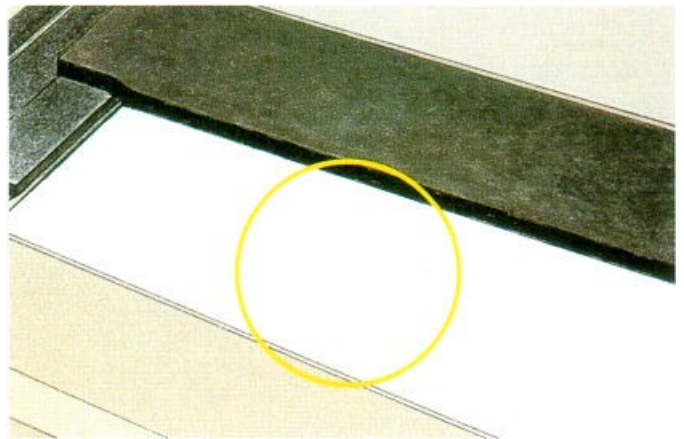

### MAT P


MAT P is a 100 g non-woven polypropylene layer.

MAT P is a separation layer between the waterproofing system and insulation or site applied protection.

MAT P is applied loose laid with a minimum of 60mm side lap and 100 mm end lap.

Roll	: 100m × 1m
Weight	: 12kg / roll
Packaging	: 20 rolls / pallet
	: 2000m <sup>2</sup> / pallet

### SEPARATION LAYER

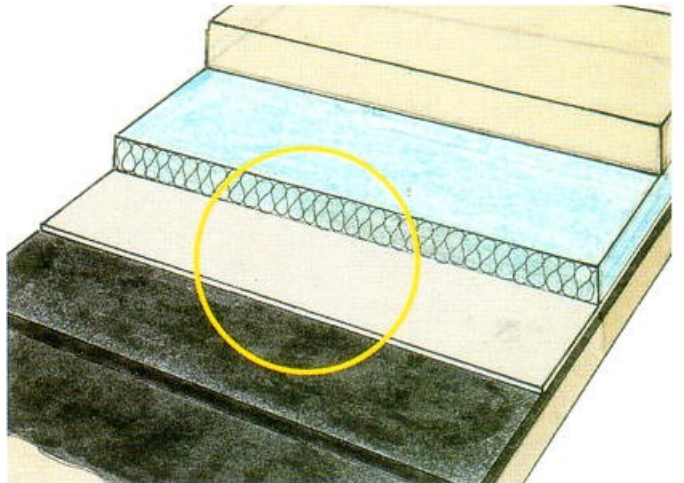



## COMPLEMENTARY PRODUCTS

### EXCELJOINT – BUTYL CORD


EXCELJOINT 33/50 is a 4mm membrane reinforced with a polyamide tissue.

BUTYL CORD has a butyl (rubber) base.

EXCELJOINT and BUTYL CORD have been designed for the waterproofing system on movement joints.

	<b>Exceljoint 33</b>	<b>Exceljoint 50</b>	<b>Butyl Cord</b>
Roll	10m × 1m	10m × 1m	10m × 1m
Weight	15kg	22kg	11kg

### MOVEMENT JOINT

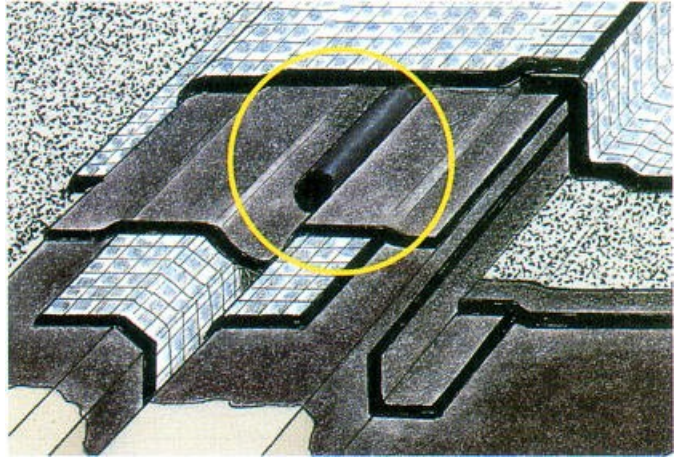

### MASTIC HYRENE


MASTIC HYRENE is a cold applied bituminous adhesive containing special solvents.

MASTIC HYRENE is used to bond the insulation or first layer to the deck.

Average rate is usually 500g/m<sup>2</sup>.

Weight	: 25kg / drum
Packaging	: 22 drums / pallet

### ADHESIVE MASTIC

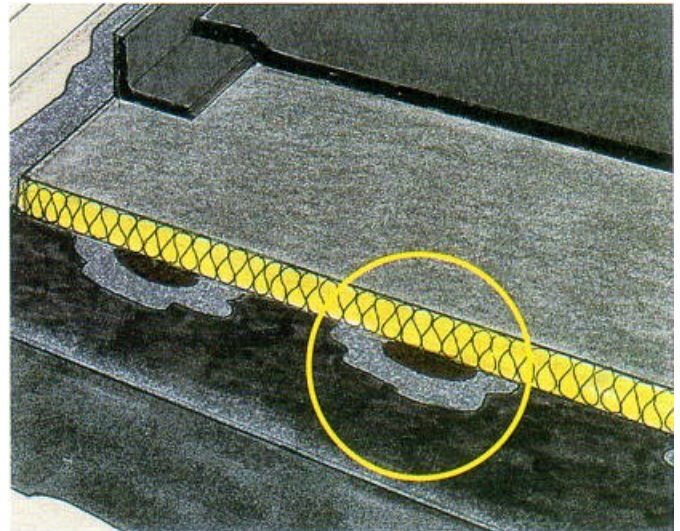

Axter Ltd  
West Road  
Ransomes Europark  
Ipswich  
Suffolk  
IP3 9SX

tel: 01473 724 056  
fax: 01473 723 263  
email: sales@axterltd.co.uk  
web: www.axter.co.uk

