

June 2015


TECHNICAL DATA SHEET

PROTECTION MAT

Robust, flexible, high density vulcanised rubber crumb protection membrane

Axter's rubber crumb Protection Mat is designed to protect bituminous and synthetic roof waterproofing membranes from damage caused by abrasion, point loading, blunt materials, backfilling and concrete casting. It reduces the risk of damage and perforation of the waterproofing membrane both during the roofing works and after completion provides permanent protection, thus ensuring and extending the lifespan of the membrane.

Protection Mat is made up of natural and synthetic elastomeric compounds and has a density of 950 kg/m³. It is manufactured from recycled materials with one of the main components being recovered PFU (from used car tyres), bound by polyurethane resin.

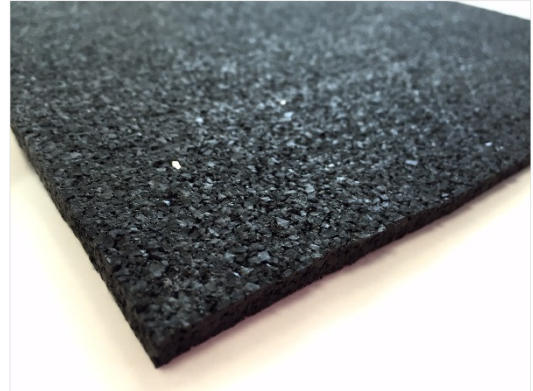

Advantages

- Excellent mechanical protection of the waterproofing membrane
- Easy to install
- Immediately trafficable after installation
- Eco-friendly due to being manufactured from recycled rubber
- Excellent mechanical resistance to impact by blunt materials
- High dimensional stability for permanent loads (green roofs, foundations, driveway roofs and floors)
- Strong resistance to abrasion and tearing
- Rot-proof, resistant to mould and moisture
- Re-usable
- Cost-effective

Physical & Mechanical Characteristics

Description	Unit		Norms	Tolerances
Rubber thickness	mm	6	EN 13849-1	± 10%
Rubber density	kg/ m ³	950		± 7%
Elongation at break	%	35	EN ISO 1798	± 5%
Tensile strength	N/mm ²	0.9	EN ISO 1798	± 2%
Static puncture resistance	kg	45	EN 12730 met B	Min
Dynamic puncture resistance	mm	≥2500	EN 12691 met A	Min
Heat resistance	°C	Up to + 80		-
Cold resistance	°C	Up to - 30		-
Fire rating		B2	DIN 4102	-
SHORE A hardness		50		± 10%

* no drilling

Thermal Performance

Description	Symbol	Unit	Value	Norms	Notes
Thermal conductivity	(λ)	W/mK	0.1226	UNI EN 12667:2002	Cert no. 078-09-the TR

Chemical Performance

Characteristic	Performance
Resistance to microbes	Resistant to fungi, insects and microbe attack
Chemical interaction	Highly resistant to acids and alkaline detergents, rot-proof
Electrostatics	Does not accumulate static charge and prevents static movement between materials
Eco-sustainability	100% recyclable

Installation

The Protection Mat provides excellent protection to waterproofing membranes. Due to its flexibility, it can be used on horizontal or curved surfaces and it can be cut and shaped around any construction detail. It is designed to be used effectively on inverted roofs, green roofs, regularly trafficked roofs and walkways, parking areas, on maintenance areas and in artificial tunnels.

It is ideal for the horizontal and vertical protection of underground waterproofing foundation walls, basements, drains, tunnels, and ditches.

It can also be used as an anti-vibration protection layer under machinery (such as compressors, air conditioning units and generators) when installed on the roof.

Horizontal Installation

The Protection Mat is applied to protect the bituminous membrane by laying out rolls adjacent to each other and overlapping them by 8 cm, taking care not to leave any gaps between them. This then needs to be covered by further layers such as concrete or ballast which will ensure that the Protection Mat is well anchored.

Vertical Installation – bituminous membranes only

Torch the bituminous membrane which has already been applied as waterproofing of the foundation so that it becomes tacky.

Apply the Protection Mat and press it into the membrane firmly so that it bonds fully.

Repeat with the next roll, butting it up to the previous one, so that there are no gaps between the panels.

A slight overlap is tolerated (max 1 cm.).

For best results it is recommended to start installation of the Protection Mat from the top working downwards.

Dimensions and Packaging

	Unit	Value	Tolerances
Thickness	mm	6	$\pm 10\%$
Roll height	m	1	$\pm 2\%$
Roll length **	m	8	$\pm 1\%$
Weight per m ²	kg/m ²	4.5	$\pm 7\%$
Number of rolls per pallet	pcs	16	
Total area per pallet	m ²	128	
Pallet dimension	cm	100x120x100+10	

The manufacturer reserves the right without prior notice to modify the composition of these products. Characteristics provided in this publication derive from data obtained under controlled test conditions. Axter Ltd makes no warranties, express or implied, as to the properties and performance under any variations from such conditions in actual construction.