



- 1 Hyranger SPOT under-layer
- 2 Excel HRS capping sheet
- 3 Hytherm ADH tapered/flat board
Insulation (thickness to achieve design
U-value and/or design fall)
- 4 Excel HRS Detail Membrane
- 5 35py Angle Strip
- 6 Axter Rooflight
- 7 Axter Rooflight kerb
(Full Kerb option shown)
- 8 Vernis Antac ST primer
- 9 VAP AL SK Vapour Control Layer
- 10 18mm WBP plywood deck
(by specialist subcontractor)

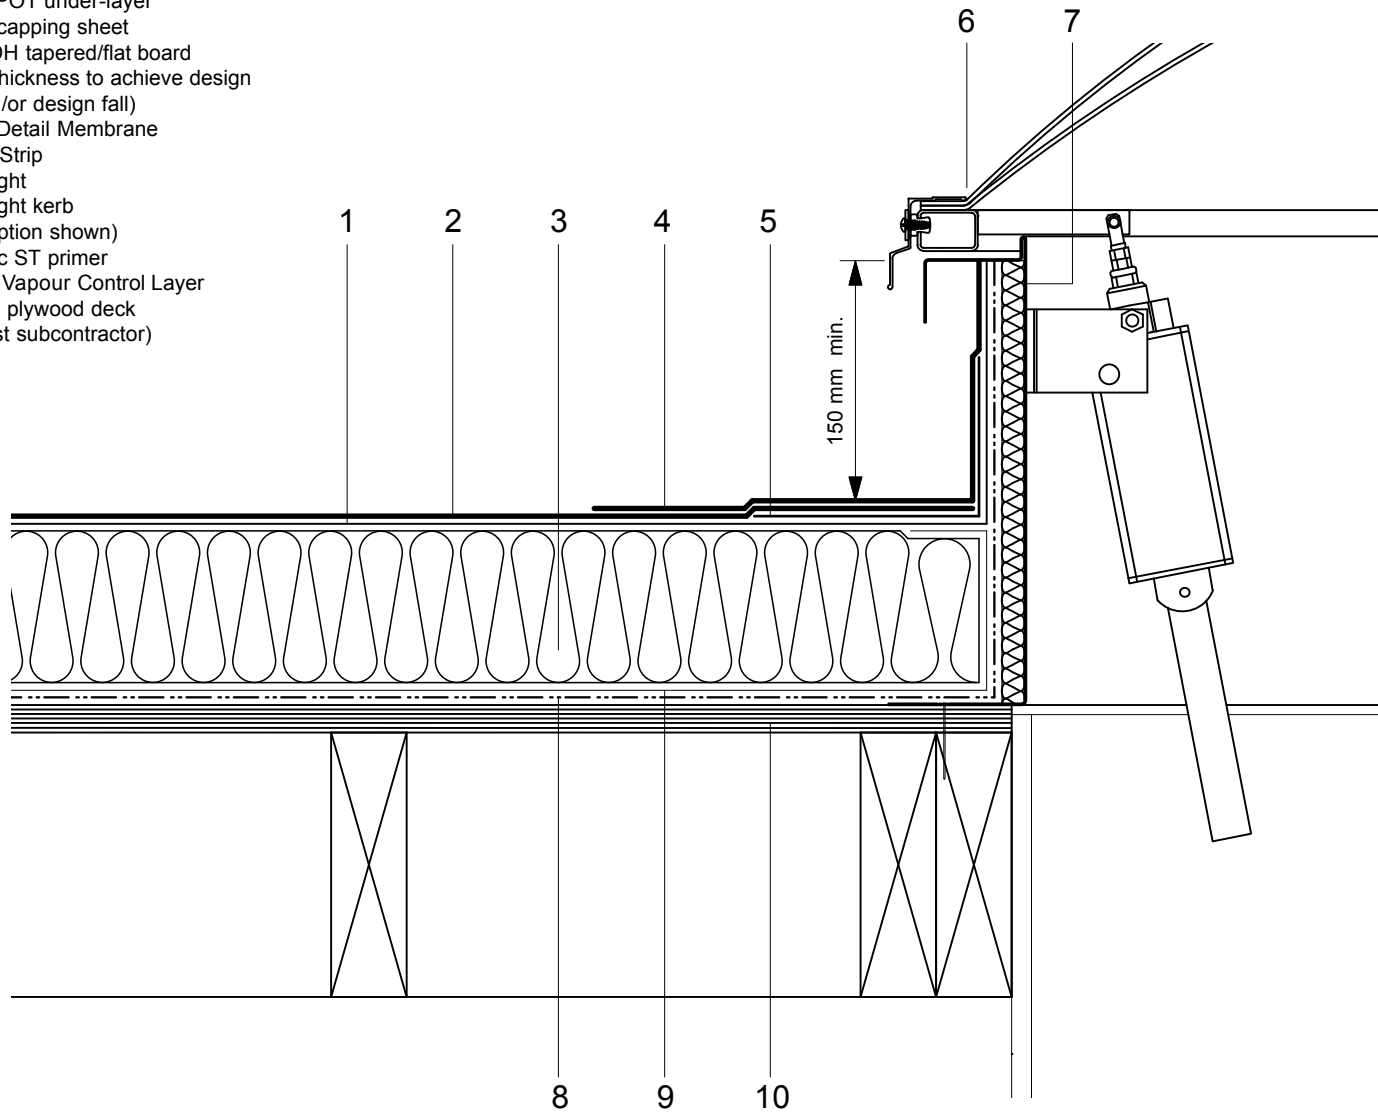


kerb options


02
E_s

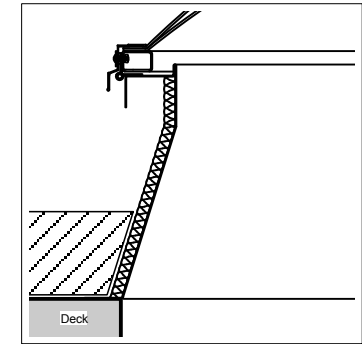

Tapered Kerb

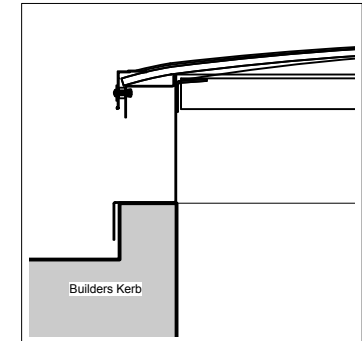

Adapter Plate

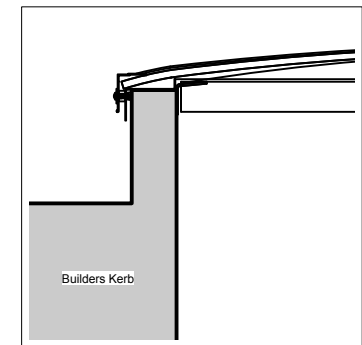

Z Frame



Do Not Scale. All dimensions to be checked on site by the Axtershield Installer

Axter provides detail drawings as part of our technical design service. Such drawings should only be used as a guide during the design process and should not be utilised during construction. Axter accepts no liability for misuse of this service.

PROJECT	AXTER - STANDARD DETAIL
DRAWING NUMBER	WR.P.EX.040

DRAWING	AXTER WARM ROOF - EXCEL/SPOT SYSTEM TYPICAL UPSTAND DETAIL TO AXTER ROOFLIGHT - PLYWOOD SUBSTRATE	
SCALE	1:5 @ A4	DATE
		2014

AXTER LTD
West Road, Ransomes
Europark, Ipswich,
Suffolk, IP3 9SX.
Tel: (01473) 724056
Fax: (01473) 723263
info@axterltd.co.uk

