
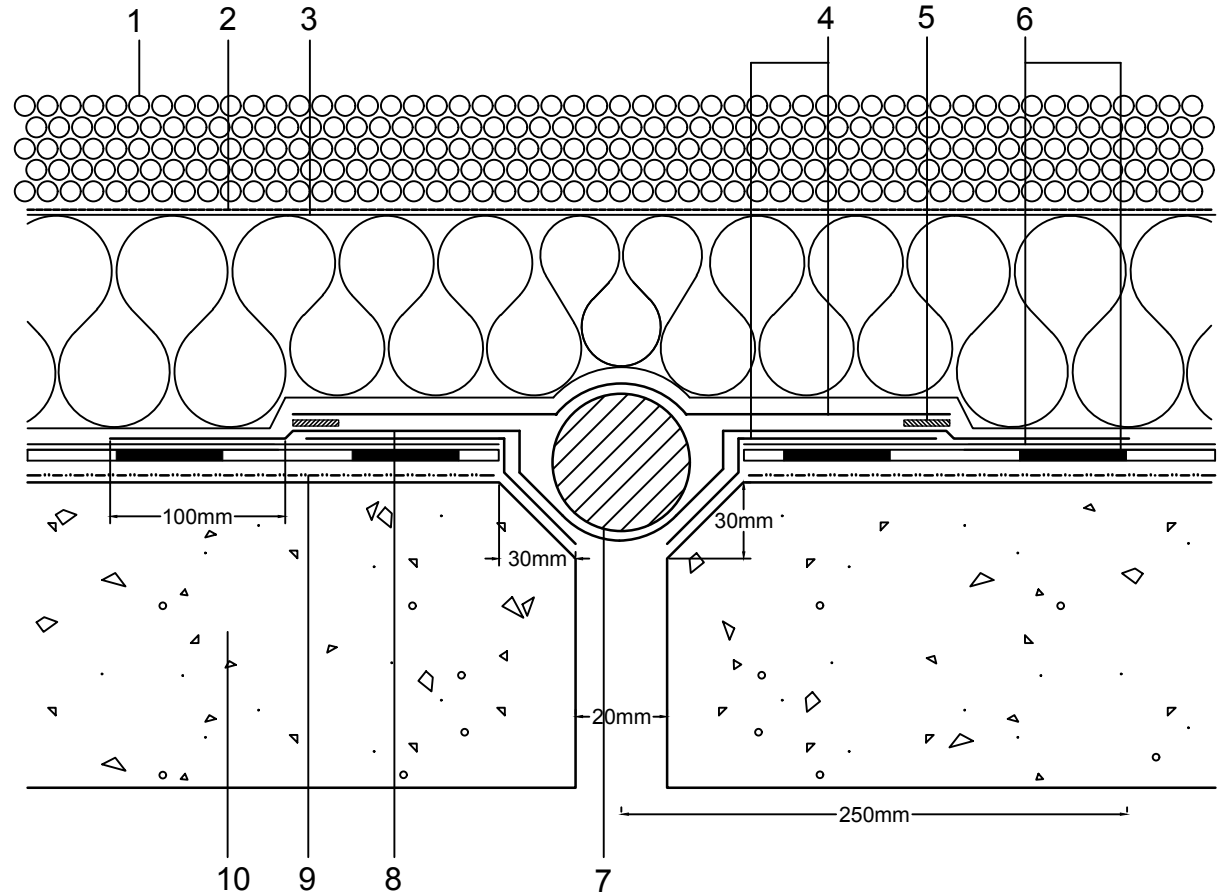


- 1 20-40mm rounded aggregate ballast with no fines to a min. depth of 50mm
- 2 Axter breather membrane sealed with tape
- 3 Axter inverted insulation to achieve design U-value
- 4 Axter Armalu aluminium faced membrane
- 5 This area to be fully bonded by torching method
- 6 Wilotekt-Plus structural waterproofing system
- 7 Axter butyl cord
- 8 Axter Excel Joint 50
- 9 Wilotekt-Plus Primer
- 10 In-situ concrete structural deck laid to zero pitch (0 -0.7° post deflection tolerances)

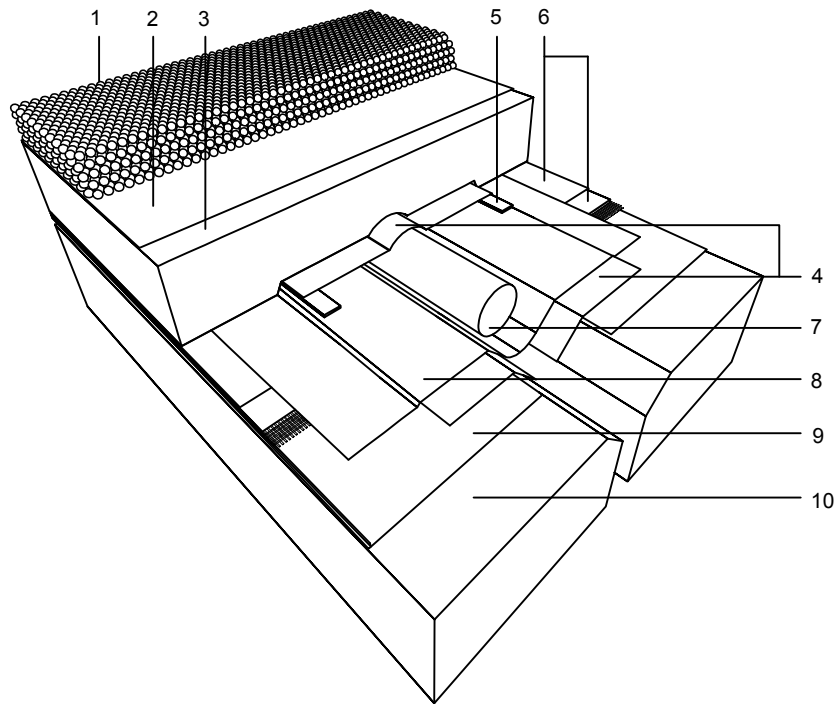

Do Not Scale. All dimensions to be checked on site by the Axtersheid Installer

Axter provide detail drawings as part of our technical design service. Such drawings should only be used as a guide during the design process and should not be utilised during construction. Axter accepts no liability for misuse of this service.

PROJECT	
CLIENT	

DRAWING			
WILOTEKT-PLUS EXPANSION JOINT DETAIL			
DWG.N°	SCALE	DATE	REV
WP.100.16	NTS	2016	



www.axter.co.uk
info@axterltd.co.uk
01473 724 056

Axter Ltd.
West Road, Ransomes Europark,
Ipswich, Suffolk, IP3 9SX