


- 1 ECOLINE ADH fleeceback
single ply membrane fully bonded
using ADH Adhesive
- 2 Hytherm tapered/flat board Insulation
mechanically fixed with Ecoline insulation
washers and fixings (thickness to achieve
design U-value and/or design fall)
- 3 Vernis Antac ST primer
- 4 Axter Vapour Control Layer
- 5 Plywood substrate
(by specialist subcontractor)
- 6 Heat welded seam - 40mm
- 7 ADH Adhesive
- 8 Mechanically fixed hard edge/batten
(by specialist subcontractor)
- 9 ECO/R cover strip
- 10 ECOMETAL preformed PVC coated
metal trim mechanical (MTP) fixing at
200mm ctrs
- 11 Guttering by other
- 12 Facia board
- 13 Galvanised bent metal angle
mechanically fixed at perimeter
(by specialist subcontractor)

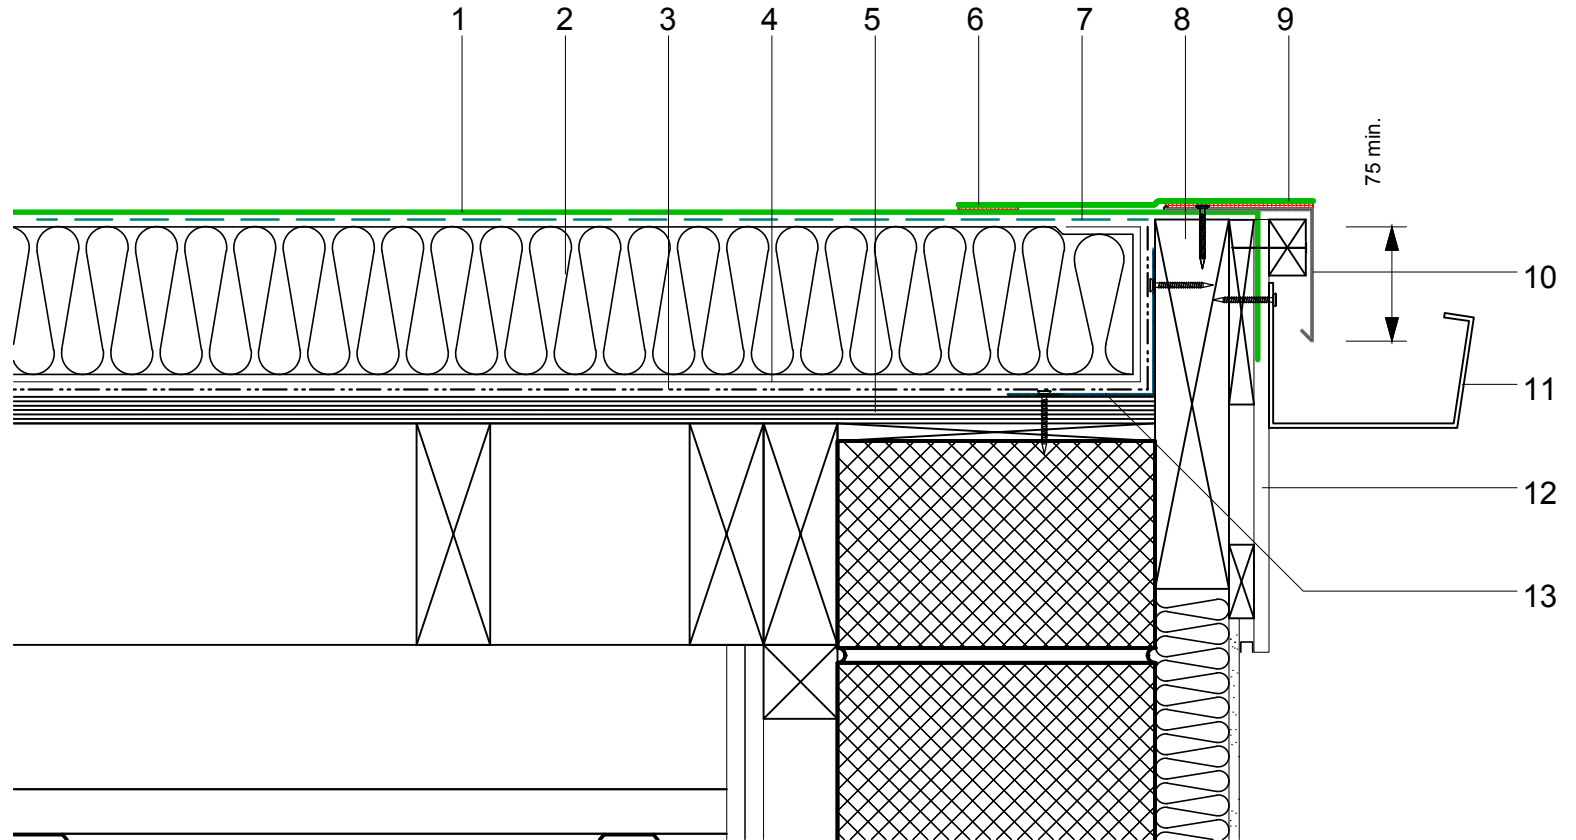

Do Not Scale. All dimensions to be checked on site by the Axtershield Installer

Axter provide detail drawings as part of our technical design service. Such drawings should only be used as a guide during the design process and should not be utilised during construction. Axter accepts no liability for misuse of this service.

PROJECT	AXTER - STANDARD DETAIL
CLIENT	N/A

DRAWING	AXTER WARM ROOF - ECOLINE ADH SYSTEM TYPICAL DRIP TO GUTTER DETAIL - PLYWOOD SUBSTRATE			
DWG.No	SCALE	DATE	REV	
WR.P.EL.adh.40	1:5 @ A4	10.16	N/A	



www.axter.co.uk
info@axterltd.co.uk
01473 724 056

Axter Ltd,
West Road, Ransomes Europark,
Ipswich, Suffolk, IP3 9SX